

Waiver:

This data sheet is for guidance only and must not be used for proper working drawings. Please contact Swallow Lifts for particular details before proceeding. Owing to our policy of continual improvement we reserve the right to alter specifications and dimensions without prior notice.

Supaflight

(gearless traction)

CUSTOM-GRL8

8 Person (630Kg)


ADJACENT ENTRY



SWALLOW
LIFTS




To be used for guidance only - specific details may be found on Swallow Lifts Builder's Work Drawings

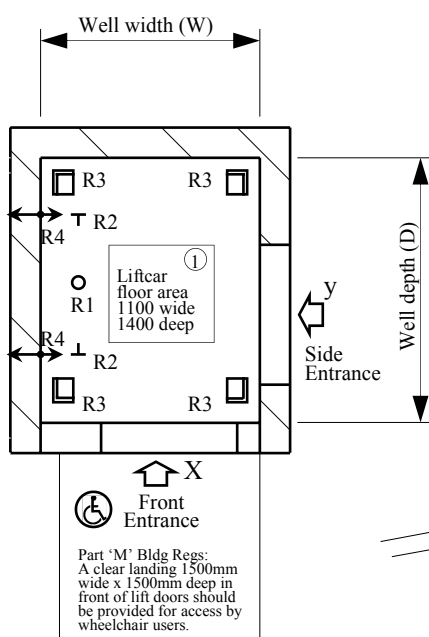

EQUIVALENT DEAD LOADS IMPOSED DUE TO LIFT OPERATION (Kg)

	Wall Mounted Models	Structure Mounted Models	Type of Loading
Lift Pit Floor	R1	4617	Load due to car weight + load + hydraulic cylinder
	R2	3937	Load due to car buffering or safety gear operation
	R3	not applicable	Load at base of structure in each corner
Side Wall	R4	495	Push in/Pull out load

Wall Mounted Models	Lifting beam supplied by builder
Structure Mounted Models	Lifting beam supplied by Swallow Lifts

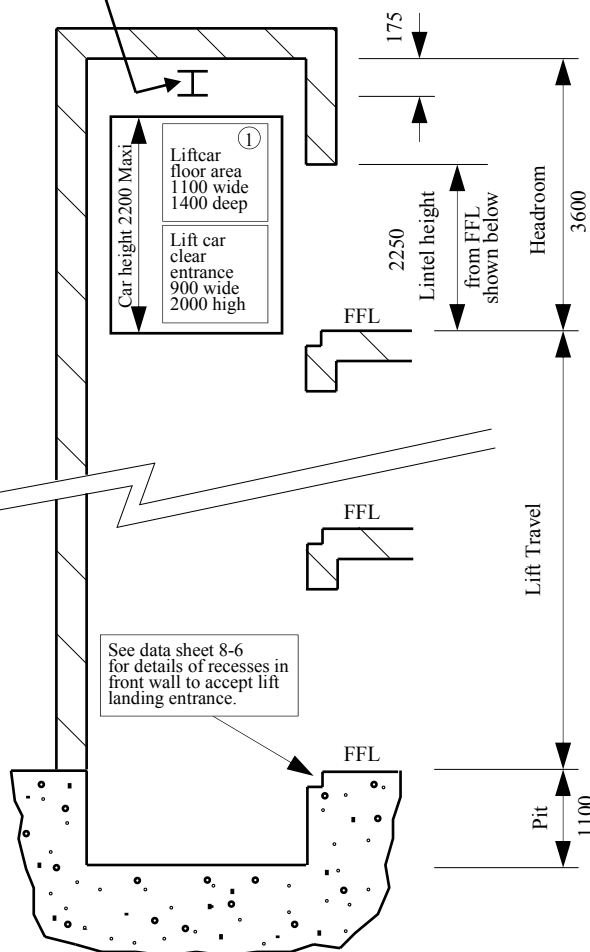

IMPORTANT

On Wall Mounted Models, Unistrut inserts ref P3270 to be built into lift pit and lift well walls by builder *before* installation. See

MODEL REF	WALL MOUNTED MODELS			STRUCTURE MOUNTED MODELS		
	LIFT DOORS ARRANGEMENT			Plan Well Dimensions Front & side entrance		
		Car Doors	Landing Doors	W	D	
M8-2S 2S		Auto 2 panel side opening 2S	Auto 2 panel side opening 2S	1800	1800	

① Part 'M': Whilst this model does not comply with the dimensions of Part 'M' of the building Regulations, it has been specially designed to take a wheelchair and attendant.



CM8-5
21/11/05